Overview 5.1

#### **Summary**

This chapter contains procedures for the valuation of residential dwellings, including single and multi-family dwellings (semi-detached; townhouse), summer cottages, A-Frame summer cottages, manufactured homes, manufactured home extensions, travel trailers, basements and basement rooms.

Using the cost provided for the area nearest to the size of the residence will give a result that lies within the intended degree of accuracy. If a more precise square foot cost is desired, interpolate between the size increments in the cost table.

SAMA's 2023 Cost Guide provides directions for the valuation of property by the cost approach; it does not have the force of law.

### Copyright

This chapter is a derivative work based on the "Residential Cost Handbook" which is the copyrighted material of Marshall & Swift, published by CoreLogic Inc. © 2022. This chapter has been reproduced under licence granted by and with the permission of Marshall & Swift. Unauthorized reproduction of this chapter is expressly prohibited.

Portions of this section are not available for viewing due to licensing with Marshall and Swift, published by CoreLogic Inc. Therefore the factors etc. have been intentionally left blank.

This information is available for purchase by contacting:

Technical Standards and Policy Division Saskatchewan Assessment Management Agency  $200-2201-11^{th}$  Avenue Regina, Saskatchewan S4P 0J8

> Phone: (306) 924-8000 Toll Free: 1-800-667-SAMA (7262) Fax: (306) 924-8070

Email: info.request@sama.sk.ca

Website: http://www.sama.sk.ca

# **Residential Dwellings**

Overview 5.1

Page: 2

### **Occupancy Description**

### **Single Family Dwelling**

A residential dwelling typically designed and constructed for the accommodation and use of one family. Limited structural modifications may allow for the use of these dwellings by more than one family.

### **Multi-Family Dwelling (Semi-Detached; Townhouse)**

A residential dwelling designed and constructed for the accommodation of two or more families. A multi-family dwelling is constructed with self contained living areas for each family. Each family living area is a separate unit with exterior entries and interior layouts arranged to provide security and privacy for each unit. A unit may be an End Row or an Inside Row. A multi-family unit is always next to another unit – it is never above or below another unit.

There are two types of multi-family dwellings:

#### **Semi-Detached**

A multi-family residential building divided into two family living units, with a common wall between the units and separate entry, electrical, plumbing and heating systems. Each semi-detached unit is an End Row.

Example 1: Two 1-Storey Semi-Detached (2 End Rows)



### **Townhouse**

A multi-residential building divided into three or more family living units, with a common wall between the units, and separate entry, electrical, plumbing and heating systems. A townhouse unit may be an End Row or an Inside Row.

### **Townhouse Examples:**

Example 1: Four 2-Storey Townhouses (2 End Rows & 2 Inside Rows)



Example 2: Example 2: Four 1-Storey Townhouses (4 End Rows)



Example 3: Example 3: Eight 2-Storey Townhouses (2 End Rows and 6 Inside Rows)



	Excellent Quality
and Swift,	If this chapter are not available for viewing due to licensing with Marshal published by CoreLogic Inc. Therefore the classification guidelines, rate setc. have been intentionally left blank.

Excellent Quality (cont'd)		

Very Good Quality	
Portions of this chapter are not available for viewing due to licensing with Marshall and Swift, published by CoreLogic Inc. Therefore the classification guidelines, rates and factors etc. have been intentionally left blank.	

Very Good Quality (cont'd)		

Good Quality	
Portions of this chapter are not available for viewing due to licensing with Marshall and Swift, published by CoreLogic Inc. Therefore the classification guidelines, rates and factors etc. have been intentionally left blank.	

Good Quality (cont'd)	

Average Quality	
Portions of this chapter are not available for viewing due to licensing with Marsh and Swift, published by CoreLogic Inc. Therefore the classification guidelines, raand factors etc. have been intentionally left blank.	

Average Quality (cont'd)		

Fair Quality	
Portions of this chapter are not available for viewing due to licensing with Marshall and Swift, published by CoreLogic Inc. Therefore the classification guidelines, rates and factors etc. have been intentionally left blank.	

Fair Quality (cont'd)

Low Quality	
Portions of this chapter are not available for viewing due to licensing with Marsha and Swift, published by CoreLogic Inc. Therefore the classification guidelines, rat and factors etc. have been intentionally left blank.	

Low Quality (cont'd)	

	Very Low Quality		
and Swi	s of this chapter are not available for viewing due to licensing with Marshall ift, published by CoreLogic Inc. Therefore the classification guidelines, rate tors etc. have been intentionally left blank.		

Very Low Quality (cont'd)

### 1-Storey Rate (\$/sq. ft.)

Area (sq. ft.)	Excellent	Very Good	Good	Average	Fair	Low	Very Low
≤ 400							
600							
800							
1,000							
1,200							
1,400							
1,600							
1,800							
2,000							
2,200							
2,400							
2,800							
3,200							
4,000							
4,800							
5,600							
6,400							
7,200							
≥ 8,000							


## **Single Family Dwellings**

**Single Family Dwelling Calculation Procedure** 

Description	No.	Page No.
Quality	5.3	1-14
a) Structure Rate = $(a_1 \times a_2)$		
a <sub>1</sub> . Square Foot Rate	5.3	15
a <sub>2</sub> . Wall Height Adjustment	4.5	1-2
b) Structure Rate Adjustments = $(+/-b_1 + b_2)$		
b <sub>1</sub> . Heating/Cooling Adjustment	4.7	1
b <sub>2</sub> . Hillside Adjustment	4.9	1
c) Value Subtotal = (a + b)		
d) Incomplete Construction Adjustment	3.7	1-2
e) Adjusted Structure Rate = $c - (c \times d)$		
f) Effective Area = $(f_1 \times f_2)$		
f <sub>1</sub> . Total Living Area	4.4	1-3
f <sub>2</sub> . Effective Area Factor	4.4	1-3
g) Miscellaneous Adjustments = $(+/-g_1 + g_2)$		
g <sub>1</sub> . Plumbing Fixtures Adjustment	4.6	1
g <sub>2</sub> . Fireplace Count	4.8	1
h) Replacement Cost New = $(e \times f) + g$		

After the replacement cost new (RCN) has been calculated, the assessed value for residential buildings and structures is determined using the calculation procedures in No. 3.2.

## **Excellent Quality**





Excellent #1 - rear elevation: 2-Storey Hillside



Excellent #2: 2-Storey



# **Single Family Dwellings**

## **Excellent Quality (cont'd)**

Excellent #3: 1-Storey Hillside



Excellent #4: 1-Storey Hillside



**Very Good Quality** 

Very Good #1: Bi-Level



## **Very Good Quality (cont'd)**







## Very Good Quality (cont'd)







## **Very Good Quality (cont'd)**

Very Good #6: 1-Storey



# **Good Quality**

Good #1: 1-Storey



Good #2: 1-Storey



## **Good Quality (cont'd)**

Good #3: 1 1/2-Storey



Good #4: Bi-Level



Good #5: 2-Storey



Good #6: Split-Level



## **Average Quality**

Average #1: 1-Storey



Average #2: 1-Storey



Average #3: Bi-Level



Average #4: 1 1/2-Storey



## **Average Quality (cont'd)**

Average #5: 2-Storey



Average #6: Split-Level



# **Fair Quality**

Fair #1: 1-Storey



Fair #2: 1-Storey



## Fair Quality (cont'd)

Fair #3: 1 1/2-Storey



Fair #4: 1 1/2-Storey



Fair #5: 1 1/2-Storey



## **Low Quality**

Low #1: 1 1/2-Storey



Low #2: 1-Storey



Low #3: 1-Storey



Low #4: 1-Storey



## **Very Low Quality**

Very Low #1: 1-Storey



Very Low #2: 1-Storey



Very Low #3: 1-Storey



## **Multi-Family Dwellings**

Note: There are two types of multi-family dwellings - semi-detached and townhouse. For definitions and examples see No. 5.2.

	Excellent Quality		
Portions of this chapter are not available for viewing due to licensing with Marsha and Swift, published by CoreLogic Inc. Therefore the classification guidelines, rat and factors etc. have been intentionally left blank.			

# **Multi-Family Dwellings**

Excellent Quality (cont'd)	

# **Multi-Family Dwellings**

	Very Good Quality			
and Sw	Portions of this chapter are not available for viewing due to licensing with Marshall and Swift, published by CoreLogic Inc. Therefore the classification guidelines, rates and factors etc. have been intentionally left blank.			

Very Good Quality (cont'd)	

Good Quality			
Portions of this chapter are not available for viewing due to licensing with Marshall and Swift, published by CoreLogic Inc. Therefore the classification guidelines, rates and factors etc. have been intentionally left blank.			

(	Good Quality (cont'd)

Average Quality		
Portions of this chapter are not available for viewing due to licensing with Marshall and Swift, published by CoreLogic Inc. Therefore the classification guidelines, rates and factors etc. have been intentionally left blank.		

Average Quality (cont'd)		

	Fair Quality				
ar	Portions of this chapter are not available for viewing due to licensing with Marshall and Swift, published by CoreLogic Inc. Therefore the classification guidelines, rates and factors etc. have been intentionally left blank.				

Fair Quality (cont'd)	

End Row (Semi-Detached; Townhouse): 1-Storey Rate (\$/sq. ft)

Area (sq. ft.)	Excellent	Very Good	Good	Average	Fair
≤ 600					
800					
1,000					
1,200					
1,400					
1,600					
1,800					
2,000					
2,200					
2,400					
2,600					
2,800					
3,000					
3,200					
≥ 3,600					

Inside Row (Townhouse): 1-Storey Rate (\$/sq. ft.)

Area (sq. ft.)	Excellent	Very Good	Good	Average	Fair
≤ 600					
800					
1,000					
1,200					
1,400					
1,600					
1,800					
2,000					
2,200					
2,400					
2,600					
2,800					
3,000					
3,200					
≥ 3,600					

Page: 12

#### **Multi-Family Dwellings**

**Multi-Family Dwelling Calculation Procedure** 

Description	No.	Page No.
Quality	5.4	1-10
a) Structure Rate = $(a_1 \times a_2)$		
a <sub>1</sub> . Square Foot Rate	5.4	11
a <sub>2</sub> . Wall Height Adjustment	4.5	1
b) Structure Rate Adjustments = $(+/-b_1 + b_2)$		
b <sub>1</sub> . Heating/Cooling Adjustment	4.7	1
b <sub>2</sub> . Hillside Adjustment	4.9	1
c) Value Subtotal = $(a + b)$		
d) Incomplete Construction Adjustment	3.7	1-2
e) Adjusted Structure Rate = $c - (c \times d)$		
f) Effective Area = $(f_1 \times f_2)$		
f <sub>1</sub> . Total Living Area	4.4	1-2; 4
f <sub>2</sub> . Effective Area Factor	4.4	1-2; 4
g) Miscellaneous Adjustments = $(+/-g_1 + g_2)$		
g <sub>1</sub> . Plumbing Fixtures Adjustment	4.6	1
g <sub>2</sub> . Fireplace Count	4.8	1
h) Replacement Cost New = $(e \times f) + g$		

After the replacement cost new (RCN) has been calculated, the assessed value for residential buildings and structures is determined using the calculation procedures in No. 3.2

#### **Semi-Detached - Very Good Quality**





#### **Semi-Detached - Good Quality**



#### **Semi-Detached - Average Quality**






Average #2: 1-Storey Semi-Detached



Average #3: 2-Storey Semi-Detached



#### **Semi-Detached - Fair Quality**





Fair #2: 1-Storey Semi-Detached



Fair #3: 1-Storey Semi-Detached



Fair #4: 2-Storey Semi-Detached



Date: 01/2023 SAMA's 2023 Cost Guide (Non-Regulated) Page: 15

#### **Townhouse - Very Good Quality**

Very Good #1: 2-Storey Townhouse



**Townhouse - Good Quality** 


Good #1: 2-Storey Townhouse - 2 End Rows & 4 Inside Rows



Good #2: 2-Storey Townhouse - 2 End Rows & 2 Inside Rows



#### **Townhouse - Average Quality**






Average #2: 1-Storey Townhouse - 4 End Rows & 2 Inside Rows



Average #3: 2-Storey Townhouse - 2 End Rows & 2 Inside Rows



#### **Townhouse - Fair Quality**





Fair #2: 1-Storey Townhouse - 2 End Rows & 4 Inside Rows



Fair #3: 2-Storey Townhouse - 2 End Rows & 3 Inside Rows



#### Seasonal Dwelling - General

#### **Occupancy Description**

Summer cottages and A-Frame summer cottages are generally constructed as seasonal use buildings that may limit their use during winter months. The quality of the construction, floor plan, interior finish and exterior finish is below the standard for residential dwellings.

Where the quality of construction, floor plan, interior finish and exterior finish is comparable to the standard for residential dwellings value the building in accordance with the valuation procedures in No. 5.2 and 5.3.

## **Residential Dwellings**

Page: 2


	Good Quality	
anc	rtions of this chapter are not available for viewing due to licensing with Marsh I Swift, published by CoreLogic Inc. Therefore the classification guidelines, rall factors etc. have been intentionally left blank.	all ates
anc	ractors etc. have been intentionally left blank.	

Good Quality (cont'd)		


Average Quality	
Portions of this chapter are not available for viewing due to licensing with M and Swift, published by CoreLogic Inc. Therefore the classification guideline	arshall
and factors etc. have been intentionally left blank.	3, 1440

Average Quality (cont'd)	

	Fair Quality
and	tions of this chapter are not available for viewing due to licensing with Marshall Swift, published by CoreLogic Inc. Therefore the classification guidelines, rates factors etc. have been intentionally left blank.

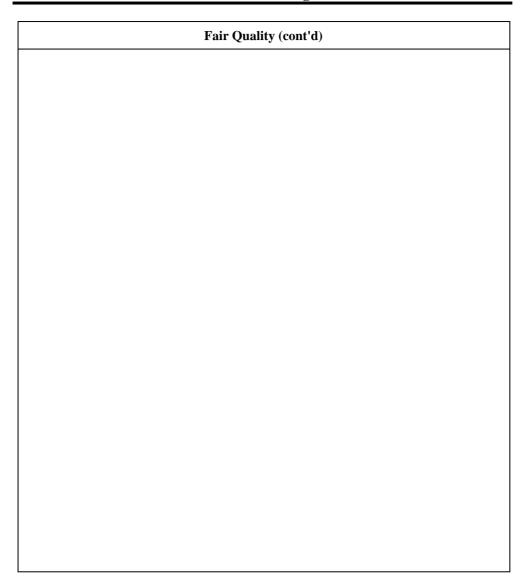

				Low	Quality				
and S	Swift, pu	ublished b	by CoreLo	available ogic Inc. ' ntionally l	Therefore	e the clas	o licensii sificatior	ng with N 1 guidelir	Marshall nes, rates

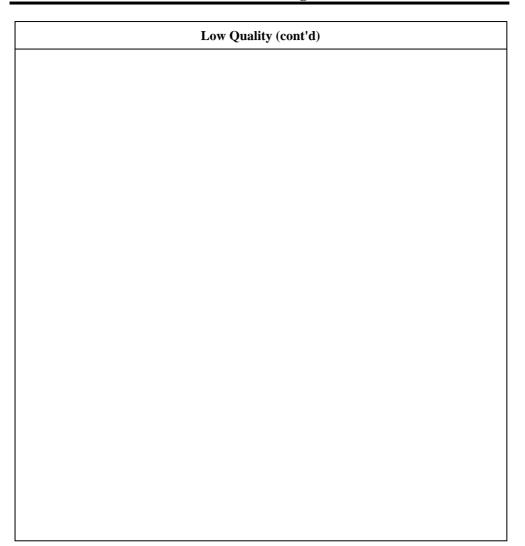

1-Storey Rate (\$/sq. ft.)

Area			Foir	Low
(sq. ft.)	Good	Average	Fair	Low
≤ 400				
600				
800				
1,000				
1,200				
1,400				
1,600				
1,800				
2,000				
2,200				
2,400				
2,600				
2,800				
3,000				
3,200				
3,600				
4,000				
4,400				
4,800				
5,200				
≥ 5,600				

**Summer Cottage Calculation Procedure** 

Description	No.	Page No.
Quality	5.6	1-8
a) Structure Rate = $(a_1 \times a_2)$		
a <sub>1</sub> . Square Foot Rate	5.6	9
a <sub>2</sub> . Wall Height Adjustment	4.5	1
b) Structure Rate Adjustments = $(+/-b_1 + b_2)$		
b <sub>1</sub> . Heating/Cooling Adjustment	4.7	1
b <sub>2</sub> . Hillside Adjustment	4.9	1
c) Value Subtotal = $(a + b)$		
d) Incomplete Construction Adjustment	3.7	1-2
e) Adjusted Structure Rate = $c - (c \times d)$		
f) Effective Area = $(f_1 \times f_2)$		
f <sub>1</sub> . Total Living Area	4.4	1-3
f <sub>2</sub> . Effective Area Factor	4.4	1-3
g) Miscellaneous Adjustments = $(+/-g_1 + g_2)$		
g <sub>1</sub> . Plumbing Fixtures Adjustment	4.6	1
g <sub>2</sub> . Fireplace Count	4.8	1
h) Replacement Cost New = $(e \times f) + g$		

After the replacement cost new (RCN) has been calculated, the assessed value for residential buildings and structures is determined using the calculation procedures in No. 3.2.

#### **Good Quality**





Good #2: 2-Storey



## **Average Quality**

Average #1: 1-Storey



#### Average Quality (cont'd)



**Fair Quality** 





Fair #2: 1 1/2-Storey



## **Low Quality**

Low #1: 1-Storey



Low #2: 1-Storey



Low #3: 1-Storey



	Good Quality	
and	ons of this chapter are not available for viewing due to licensing with Marsha Swift, published by CoreLogic Inc. Therefore the classification guidelines, rafactors etc. have been intentionally left blank.	all tes

Good Quality (cont'd)

Average Quality	
Portions of this chapter are not available for viewing due to licensing vand Swift, published by CoreLogic Inc. Therefore the classification guand factors etc. have been intentionally left blank.	with Marshall idelines, rates

Ave	erage Quality (cont`d)

	Fair Quality
and Swif	of this chapter are not available for viewing due to licensing with Marshall t, published by CoreLogic Inc. Therefore the classification guidelines, rates rs etc. have been intentionally left blank.

Fair Quality (cont'd)

A-Frame Structure Rate (\$/sq. ft.)

Area (sq. ft.)	Good	Average	Fair
≤ 300			
400			
500			
600			
700			
800			
1,000			
1,200			
1,400			
1,600			
1,800			
≥ 2,000			

**A-Frame Summer Cottage Calculation Procedure** 

Description	No.	Page No.
Quality	5.7	1-6
a) Structure Rate = $a_1$		
a <sub>1</sub> . Square Foot Rate	5.7	7
b) Structure Rate Adjustments = $\pm -b_1$		
b <sub>1</sub> . Heating/Cooling Adjustment	4.7	1-2
c) Value Subtotal = $(a + b)$		
d) Incomplete Construction Adjustment	3.7	1-2
e) Adjusted Structure Rate = $c - (c \times d)$		
f) Area		
g) Miscellaneous Adjustments = $(+/-g_1 + g_2)$		
g <sub>1</sub> . Plumbing Fixtures Adjustment	4.6	1-2
g <sub>2</sub> . Fireplace Count	4.8	1
h) Replacement Cost New = $(e \times f) + g$		

After the replacement cost new (RCN) has been calculated, the assessed value for residential buildings and structures is determined using the calculation procedures in No. 3.2.

# **A-Frame Summer Cottages**

# **Good Quality**





# **Average Quality**





# **Fair Quality**



Date: 01/2023

#### Note on different forms of home construction

The terms site-built or factory-built (includes manufactured homes, modular homes and read-to move homes) do not describe a type of home - they describe alternative methods of construction.

A site-built home refers to a home that is constructed primarily on its site.

A <u>manufactured home</u> is built in a manufacturing facility on a steel undercarriage which remains as a permanent part of its structure. A manufactured home has the necessary wheel assemblies to be transported to permanent or semi-permanent sites. Value manufactured homes using the specifications in this section.

A <u>modular home</u> is built in a manufacturing facility in sections and may be transported on a steel undercarriage, but the undercarriage is generally not a permanent and necessary structural component and is usually removed when the unit is delivered. The modular home is pieced together on-site where it is placed on a basement or crawlspace that has been prebuilt on-site. Most modern modular homes, once fully assembled, are indistinguishable from site-built homes. Value modular homes using the specifications for single and multi-family dwellings in No. 5.3 and No. 5.4.

A <u>ready-to-move</u> (RTM) is a home that is built in a manufacturing facility off-site then shipped in one piece to the building site, where it is placed on a basement or crawlspace that has been pre-built on-site. Value RTMs using the specifications for single and multi-family dwellings in No. 5.3 and No. 5.4.

#### **Manufactured Home Occupancy Description**

Note: Manufactured homes are also referred to as mobile homes.

A manufactured home is a residential dwelling that exceeds either 8 feet body width or 32 feet body length, built on a steel undercarriage which remains as a permanent part of its structure. A manufactured home has the necessary wheel assemblies to be transported to permanent or semi-permanent sites. The wheel assembly can be removed when the unit is delivered to the home site, where it is connected to the required utilities.

Manufactured homes are typically available in widths from 8 feet to 36 feet and up to 80 feet in length. Double wide and triple wide are terms used to describe the manufactured home of two or three attached sections, 10 feet to 20 feet wide. Expandable additions have one or more sections that fold, collapse, or telescope into the principle unit while being transported.

Manufactured homes are described in terms of width and length, 12'x56', 16'x76', etc. Most manufactured homes will have detachable tow bars. The tow bar length is not included in the overall dimensions of the manufactured home.

### **Foundation Rate**

The typical manufactured home foundation - steel or concrete piers - is included in the structure rate.

Adjust for other foundation materials as follows:

Foundation Material	Rate (\$/sq. ft.)
Skirting	
Concrete foundation	

Portions of this chapter are not available for viewing due to licensing with Marshall and Swift, published by CoreLogic Inc. Therefore the classification guidelines, rates and factors etc. have been intentionally left blank.

	Good Quality
ar	ortions of this chapter are not available for viewing due to licensing with Marshall and Swift, published by CoreLogic Inc. Therefore the classification guidelines, rates and factors etc. have been intentionally left blank.


Good Quality (cont'd)					

	Average Quality						
an	Portions of this chapter are not available for viewing due to licensing with Marshall and Swift, published by CoreLogic Inc. Therefore the classification guidelines, rates and factors etc. have been intentionally left blank.						

Average Quality (cont'd)							

	Fair Quality						
and	Portions of this chapter are not available for viewing due to licensing with Marshall and Swift, published by CoreLogic Inc. Therefore the classification guidelines, rates and factors etc. have been intentionally left blank.						

Date: 01/2023

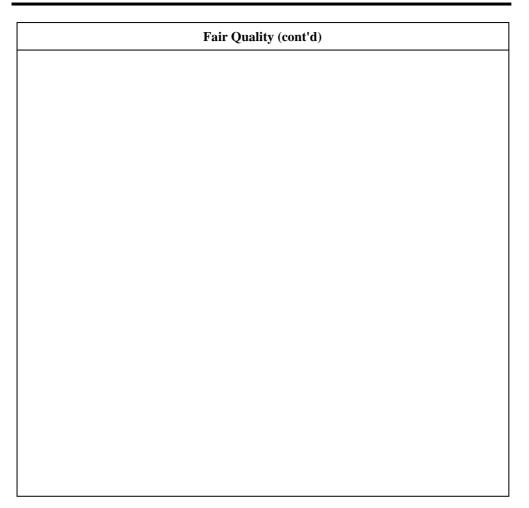

Structure Rate: Good Quality (\$/sq. ft. of floor area)

Date: 01/2023

(1144)		Width (feet)								
Length (feet)	≤ 10	12	14	16	18	20	24	28	32	≥36
≤ 28										
32										
36										
40										
44										
48										
52										
56										
60										
64										
68										
72										
76										
≥80	·									

Page: 10

# Structure Rate: Average Quality (\$/sq. ft. of floor area)

(φ/sq. 1ι.	01 110 01	Width (feet)									
Length (feet)	≤8	10	12	14	16	18	20	24	28	32	≥36
≤ 28											
32											
36											
40											
44											
48											
52											
56											
60											
64											
68											
72											
76											
≥ 80											

Structure Rate: Fair Quality (\$/sq. ft. of floor area)

(φ/sq. 1ι. 01		Width (feet)									
Length (feet)	≤8	10	12	14	16	18	20	24	28	32	≥36
≤ 20											
24											
28											
32											
36											
40											
44											
48											
52											
56											
60											
64											
68											
72											
76											
≥ 80											

Page: 12

### **Manufactured Homes**

### **Manufactured Home Calculation Procedure**

Description	No.	Page No.
Quality	5.8	3-8
a) Structure Rate = $(a_1 \times a_2)$		
a <sub>1</sub> . Manufactured Home Width Square Foot Rate	5.8	9-11
a <sub>2</sub> . Wall Height Adjustment	4.5	1
b) Structure Rate Adjustments = $(+/-b_1 + b_2)$		
b <sub>1</sub> . Heating/Cooling Adjustment	4.7	1-2
b <sub>2</sub> . Foundation Adjustment	5.8	2
c) Value Subtotal = (a + b)		
d) Incomplete Construction Adjustment	3.7	1-2
e) Adjusted Structure Rate = $c - (c \times d)$		
f) Area		
g) Miscellaneous Adjustments = $(+/-g_1 + g_2)$		
g <sub>1</sub> . Plumbing Fixtures Adjustment	4.6	1-2
g <sub>2</sub> . Fireplace Count	4.8	1
h) Replacement Cost New = $(e \times f) + g$		

After the replacement cost new (RCN) has been calculated, the assessed value for residential buildings and structures is determined using the calculation procedures in No. 3.2.

# **Good Quality**

Good #1: 22'x58'



Good #2: 20'x76'



Good #3: 20'x76'

Date: 01/2023



Page: 14

# **Manufactured Homes**

# **Average Quality**

Average #1: 20'x76'



Average #2: 14'x76'



Average #3: 16'x76'



Average #4: 20'x76'



Date: 01/2023 SAMA's 2023 Cost Guide (Non-Regulated)

# **Fair Quality**

Fair #1: 13'x52'



Fair #2: 12'x48'



Fair #3: 8'x34'

Date: 01/2023



Page: 16

#### **Occupancy Description**

Date: 01/2023

A manufactured home extension is a section attached to a manufactured home, typically used for bedrooms, living or recreational rooms. The quality of a manufactured home extension is determined from the quality of the attached manufactured home.

Structure Rate: (\$/sq. ft. of floor area)

Area (sq. ft.)	Good	Average	Fair
≤ 120			
240			
360			
480			
600			
720			
840			
960			
1,080			
1,200			
1,320			
1,440			
1,560			
1,680			
1,800			
1,920			
≥ 2,000			

Portions of this chapter are not available for viewing due to licensing with Marshall and Swift, published by CoreLogic Inc. Therefore the classification guidelines, rates and factors etc. have been intentionally left blank.

Page: 2

### **Manufactured Home Extensions**

### **Manufactured Home Extension Width Adjustment**

Width (feet)	Factor
≤ 8	1.24
9	1.22
10	1.18
11	1.15
12	1.12
13	1.09
14	1.07
15	1.05
16	1.03
17	1.02
≥ 18	1.00

### **Manufactured Home Extension Calculation Procedure**

Description	No.	Page No.
a) Structure Rate = $(a_1 \times a_2 \times a_3)$		
a <sub>1</sub> . MH Extension Square Foot Rate	5.9	1
a <sub>2</sub> . MH Extension Width Adjustment	5.9	2
a <sub>3</sub> . Wall Height Adjustment	4.5	1
b) Structure Rate Adjustments = $(+/-b_1 + b_2)$		
b <sub>1</sub> . Heating/Cooling Adjustment	4.7	1-2
b <sub>2</sub> . Foundation Adjustment	5.8	2
c) Value Subtotal = $(a + b)$		
d) Incomplete Construction Adjustment	3.7	1-2
e) Adjusted Structure Rate = $c - (c \times d)$		
f) Area		
g) Replacement Cost New = $(e \times f)$		

After the replacement cost new (RCN) has been calculated, the assessed value for residential buildings and structures is determined using the calculation procedures in No. 3.2.

#### **Occupancy Description**

Travel trailers are generally 8 feet or less in width and usually under 40 feet in length.

#### Quality

There are no construction qualities for travel trailers.

**Structure Rate: (\$/sq. ft. of floor area)** 

Area (sq. ft.)	· (ψ/β <b>q. 1ε. 61</b> 116
≤ 224	
256	
288	
320	
352	
384	
416	
≥ 448	

### **Travel Trailer Calculation Procedure**

Description	No.	Page No.
a) Structure Rate = a <sub>1</sub>		
a <sub>1</sub> . Travel Trailer Width Square Foot Rate	5.8	10
b) Area		
c) Replacement Cost New = (a x b)		

After the replacement cost new (RCN) has been calculated, the assessed value for residential buildings and structures is determined using the calculation procedures in No. 3.2.

Portions of this chapter are not available for viewing due to licensing with Marshall and Swift, published by CoreLogic Inc. Therefore the classification guidelines, rates and factors etc. have been intentionally left blank.

#### **Occupancy Description**

Basement is typically located under the main floor area of a main dwelling or residential structure and is below or partially below ground level. A typical basement is set 6 to 7 feet in the ground and has a few small windows. Basements may be constructed from a number of materials, including, but not limited to poured concrete, pressure treated wood, concrete block and field stone.

The basement rates include only the basement walls and floor. The foundation is included in the total base rate for the residential building. The cost also includes a floor drain, wood or steel pipe columns to support the living area above, a minimal number of electrical outlets, windows and a stairway.

The quality of a basement is determined from the main dwelling located above.

#### **Variations**

#### Crawl Spaces

Spaces where the perimeter wall is 4 to 5 feet in height are classified as crawl spaces. A crawl space is typically located under split-level design houses. A crawl space should not be rated unless it has a concrete floor.

#### Cellars or Dugouts

Earth dugouts or cellars with board walls and light concrete floor should not be valued. Only those basements that have some form of masonry and/or pressure-treated wood retaining foundation walls and are at least 6 feet in height should be valued.

#### Bi-level

The basement of a bi-level house is set 3 to 4 feet in the ground and has full size windows.

#### Split-level

Basement of a split level house. Part of the basement is set 6 to 7 feet in the ground and has a few small windows. The other part of the basement is set 3 to 4 feet in the ground and has full size windows.

#### Capped Basement

A basement with a roof that has no house on top of it. A capped basement may be lived in temporarily until the house is built, or it may be used as a permanent dwelling. It is covered with roofing material and a basement entry has been built. If the basement interior is finished, refer to the criteria in No. 5.12 to value as a Basement Room.

Portions of this chapter are not available for viewing due to licensing with Marshall and Swift, published by CoreLogic Inc. Therefore the classification guidelines, rates and factors etc. have been intentionally left blank.

### **Basement Garage**

Garages that are integrated into the structural components of a basement, with no portion of the garage extending from the basement. The following lump sum adjustments are added as an additional feature.

Quality	Single Garage
Excellent	
Very Good	
Good	
Average	
Fair	
Low	
Very Low	

Quality	Double Garage
Excellent	
Very Good	
Good	
Average	
Fair	
Low	
Very Low	

### **Basement Walkout Adjustment**

A lump sum value is added to the basement to recognize an exterior entrance.

Quality	Basement Walkout
Excellent	
Very Good	
Good	
Average	
Fair	
Low	
Very Low	

### **Basements**

### Wall Height

The standard wall height for basements is 8 feet. An adjustment for wall heights greater or less than 8 feet is made by application of the wall height adjustment factor.

### Basement Wall Height Adjustment

Wall Height (ft.)	Factor
6	
7	
8	
9	
10	
11	
≥ 12	

# Basement Structure Rate - Single Family Dwellings and Manufactured Homes (\$/sq. ft.)

The following structure rates apply regardless of the construction material used.

Area (sq. ft.)	Excellent	Very Good	Good	Average	Fair	Low	Very Low
≤ 200							
400							
600							
800							
1,000							
1,200							
1,600							
2,000							
2,400							
2,800							
≥ 3,200							

5.11

# Basement Structure Rate - Summer Cottages and A-Frame Summer Cottages (\$/sq. ft.)

The following structure rates apply regardless of the construction material used.

Area (sq. ft.)	Good	Average	Fair	Low
≤ 200				
400				
600				
800				
1,000				
1,200				
1,600				
2,000				
≥ 2,400				

### **End Row Basement Structure Rate**

- Multi-Family Dwelling (Semi-Detached; Townhouse) (\$/sq. ft.)

The following structure rates apply regardless of the construction material used.

Area (sq. ft.)	Excellent	Very Good	Good	Average	Fair
<u>&lt;</u> 200					
400					
600					
800					
1,000					
1,200					
≥ 1,600					

### **Inside Row Basement Structure Rate**

- Multi-Family Dwelling (Townhouse) (\$/sq. ft.)

The following structure rates apply regardless of the construction material used.

Area (sq. ft.)	Excellent	Very Good	Good	Average	Fair
<u>≤</u> 200					
400					
600					
800					
1,000					
1,200					
≥ 1,600					

### **Capped Basement Structure Rate (\$/sq. ft.)**

The following structure rates apply regardless of the construction material used.

Area (sq. ft.)	Excellent	Very Good	Good	Average	Fair	Low	Very Low
≤ 200							
400							
600							
800							
1,000							
1,200							
1,600							
2,000							
2,400							
2,800		_					
≥ 3,200		_					

# Crawl Space Structure Rate - Single Family Dwellings, Multi-Family Dwellings and Summer Cottages and Manufactured Homes (\$/sq. ft.)

The following structure rates apply regardless of the construction material used.

Area (sq. ft.)	Excellent	Very Good	Good	Average	Fair	Low	Very Low
≤ 200							
400							
600							
800							
1,000							
1,200							
1,600							
2,000							
2,400							
2,800							_
≥ 3,200							

### **Basement Calculation Procedure**

Description	No.	Page No.
a) Structure Rate = $(a_1 \times a_2)$		
a <sub>1</sub> . Square Foot Rate	5.11	3-5
a2. Wall Height Adjustment	5.11	3
b) Area		
c) Miscellaneous Adjustments = $(+c_1 + c_2)$		
c <sub>1</sub> . Basement Garage Adjustment	5.11	2
c2. Basement Walkout Adjustment	5.11	2
d) Replacement Cost New = $(a \times b) + c$		

After the replacement cost new (RCN) has been calculated, the assessed value for residential buildings and structures is determined using the calculation procedures in No. 3.2.

**Crawl Space Calculation Procedure** 

Description	No.	Page No.
a) Structure Rate = $a_1$		
a <sub>1</sub> . Crawl Space Square Foot Rate	5.11	6
b) Area		
c) Replacement Cost New = (a x b)		

After the replacement cost new (RCN) has been calculated, the assessed value for residential buildings and structures is determined using the calculation procedures in No. 3.2.

#### **Basement Rooms**

#### **Occupancy Description**

Basement rooms are partitioned living areas built in the basement. An area may be assessed as a basement room if there are finished walls and interior partitions (panelling, drywall) and one of the following two components is present:

- 1. finished ceiling
- 2. floor covering

The quality of a basement room is determined by the quality of the main dwelling.

The floor area of a basement room is measured to the inside finished surface of the exterior walls.

#### Electricity

Adequate outlets have been allowed for according to quality.

#### Heating

Date: 01/2023

Adequate heating runs from furnace or individual gas heaters allowed for according to quality.

#### **Structure Rate Application**

There are three steps in the application of the basement room structure rate to determine the replacement cost new (RCN) of the basement room.

1. The basement room area is calculated as a percentage of the total basement area in five broad ranges:

	Percentage Title	Percentage Range	Percentage Applied to Rate
1	Minimal Finish	10% to 19%	10%
2	1/4 Finish	20% to 39%	20%
3	1/2 Finish	40% to 59%	40%
4	3/4 Finish	60% to 79%	60%
5	Full Finish	80% to 100%	80%

- 2. To create the effective basement room rate, the percentage is applied to the basement room structure rate using the full basement area.
- 3. The effective rate is applied to the total basement area to determine the RCN for the basement room.

Basement room area less than 10% of the total basement area is not assessed.

After the RCN has been calculated, the assessed value for residential buildings and structures is determined using the calculation procedures in No. 3.2.

Portions of this chapter are not available for viewing due to licensing with Marshall and Swift, published by CoreLogic Inc. Therefore the classification guidelines, rates and factors etc. have been intentionally left blank.

### **Basement Rooms**

### **Example of Basement Room Rate Application**

An Average quality single family dwelling has 700 sq. ft of basement room in a 1,000 sq. ft. basement.

1. The percentage range is determined:

The percentage applied to the structure rate is 60% as the 70% falls in the "3/4 Finish" range (60% to 79%).

The effective rate is applied to the total basement area to determine the RCN for the basement room.

Basement Room Structure Rate - Single Family Dwellings and Manufactured Homes (\$/sq. ft.)

Area (sq. ft.)	Excellent	Very Good	Good	Average	Fair	Low	Very Low
≤ 200							
400							
600							
800							
1,000							
1,200							
1,600							
2,000							
2,400							
≥ 2,800							

Basement Room Structure Rate - Summer Cottages and A-Frame Summer Cottages (\$/sq. ft.)

Area (sq. ft.)	Good	Average	Fair	Low
≤ 200				
400				
600				
800				
1,000				
1,200				
1,600				
2,000				
≥ 2,400				

### **Basement Room Structure Rate**

- Multi-Family Dwellings (Semi-Detached; Townhouse) (\$/sq. ft.)

Area (sq. ft.)	Excellent	Very Good	Good	Average	Fair
<u>&lt;</u> 200					
400					
600					
800					
1,000					
1,200					
≥ 1,600					

# **Residential Dwellings**

# **Basement Rooms**

5.12